



VALVOLE A SFERA IN TRE PEZZI IN AISI 316 FIRE SAFE 3 PC BALL VALVE STAINLESS STEEL FIRE SAFE

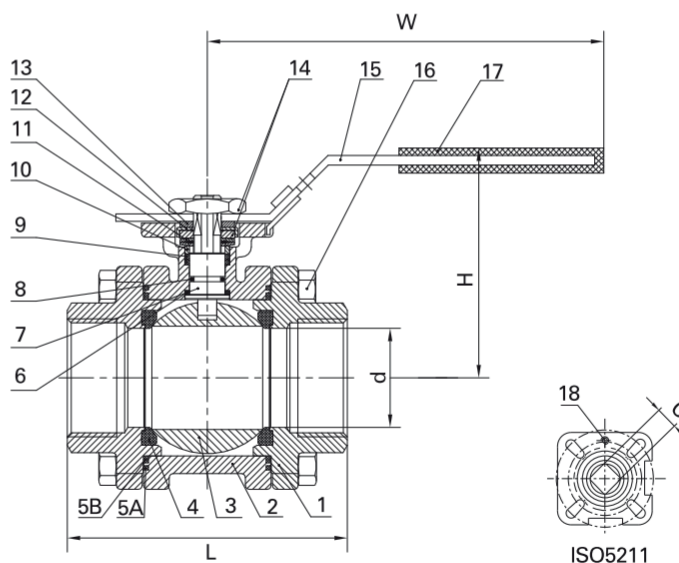

ISO5211

- Investment casting for body and cap
- Fire-safe design
- Full bore
- Thread: ISO, BS, DIN, JIS, ASME
- Length: DIN 3202-M3
- Mounting pad: ISO5211
- Pressure rating: PN125 (2000PSI)
- Working temperature: -25°C ~ + 180°C
- Material: CF8M, CF8, CF3M, WCB

PRESSURE-TEMPERATURE RATING

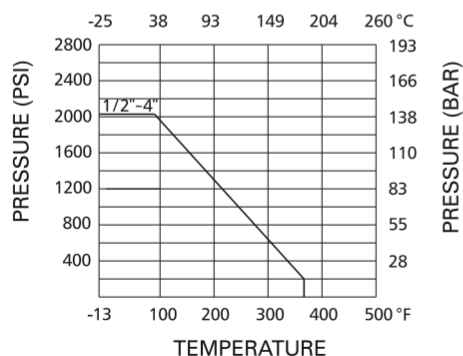

MATERIAL LIST

ITEM	PARTS	MATERIAL	QTY.
1	Cap	CF8M	2
2	Body	CF8M	1
3	Ball	SS316	1
4	Ball Seat	PTFE	2
5A	Body Gasket A	PTFE	2
5B	Body Gasket B	PTFE	2
6	Thrust Washer	PTFE	1
7	Stem	SS316	1
8	O-Ring	FKM	1
9	Stem Packing	PTFE	1
10	Stem Ring	SS316	1
11	Belleville Washer	SS301	2
12	Nut Stopper	SS304	1
13	Plate Washer	SS304	1
14	Nut	SS304	2
15	Handle	SS304	1
16	Bolt	SS304	8(12)
17	Handle Cover	PLASTIC	1
18	Stop Pin	SS304	1

DIMENSION LIST

SIZE	d	L	H	W	C	ISO5211	N-m	Kgs
1/4"	11	50	70	117	9	F03/F04	5	0.53
3/8"	12.5	60	70	117	9	F03/F04	5	0.55
1/2"	15	75	70	117	9	F03/F04	5	0.82
3/4"	20	80	78	134	11	F04/F05	8	1.36
1"	25	90	87	134	11	F04/F05	10	1.83
1-1/4"	32	110	98	203	14	F05/F07	14	3.22
1-1/2"	40	120	104	203	14	F05/F07	18	4.47
2"	50	140	112	203	14	F05/F07	25	6.37
2-1/2"	65	185	140	255	17	F07/F10	48	12.20
3"	80	205	153	255	17	F07/F10	75	18.30
4"	100	240	166	302	17	F07/F10	110	29.10